

Full Colour Multi Function Printer

RICOH
IM C3000
IM C3500
IM C4500
IM C6000

☑Copier ☑Printer ☑Facsimile ☑Scanner

RICOH
imagine. change.



Welcome to a new era of technology that keeps your workplace up to date with RICOH IM C3000 / C3500 / C4500 / C6000 range of intelligent devices. Device and technology that is designed to grow and adapt, just as your business does.

Today's workplace needs to be ready for tomorrow. RICOH Intelligent Devices provide smooth access to functionality upgrades and productivity enhancements when they are released, without needing to change your hardware. Turn your device into a powerful hub that helps you manage information workflows efficiently, using technology that is scalable, secure, sustainable and simple.

Now is the time to:

- Protect your devices with easy access to security updates
- Take advantage of easy productivity upgrades at your own pace
- Save costs by bringing high-standard quality print output in-house
- Maximise productivity with streamlined workflows



Ricoh
Outstanding Achievement in Innovation for
Ricoh Intelligent Scanning




Ricoh IM C4500
Outstanding 45-ppm Colour Copier MFP

Excellent Performance with the Best Quality Output

Greater Control of Scan and Print Management

Scanning of smaller sized documents can be easily done with the new small sized paper scan unit. The double feed detection unit helps to improve scan accuracy while the EFI controller enhances print management. Now, you can also create professional grade flyers at your own convenience with our inner multi-folding unit.

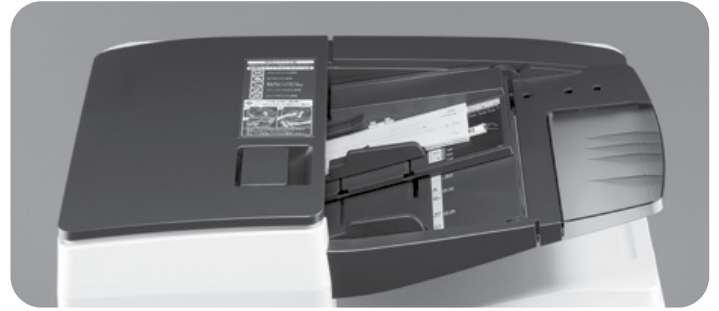

Seamless User Experience

Our intelligent devices offer efficient working and reduced user intervention by expanding paper capacity. Choose from our versatile finishing and paper options for a professional touch to save time and reduce outsourcing expenses. With RICOH Intelligent Support, experience maximum device uptime and minimal disruption across all your devices.



Maximise Cost Savings

Enjoy lower running costs and reduced energy consumption thanks to environmentally friendly low TEC (Typical Electricity Consumption) values. Furthermore, take advantage of RICOH Intelligent Support services that anticipate potential issues and send corrective instructions via the Smart Operation Panel, avoiding interruptions and prolonging the optimal performance of your device – avoiding the need for intervention by more costly IT resources.



Next-level Productivity with Smart Operations

Interact with the 10.1" Smart Operation Panel like a typical smart device and configure it for quick and easy access to apps you use most often. A variety of mobile connectivity options enable printing or scanning to the office network or cloud from a smart device with built in support for NFC, AirPrint® or Mopria®. All this underpinned by a unique suite of support apps from RICOH Smart Integration.

RICOH IM C3000 / IM C3500 / IM C4500 / IM C6000

MAIN SPECIFICATIONS

| MODEL | RICOH IM C3000 | RICOH IM C3500 | RICOH IM C4500 | RICOH IM C6000 |
|--|---|----------------|--|----------------|
| GENERAL | | | | |
| Warm-up Time | 21 Seconds | | | |
| First Output Speed : B/W | 4.5 Seconds | 4.5 Seconds | 3.6 Seconds | 2.9 Seconds |
| First Output Speed : Full Color | 6.9 Seconds | 6.9 Seconds | 5.4 Seconds | 4.2 Seconds |
| Continuous Output Speed | 30ppm | 35ppm | 45ppm | 60ppm |
| Memory Std/Max | 2GB Std / 4GB Max | | | |
| HDD Std/Max | 320GB Std/Max | | | |
| ARDF Capacity | 100 Sheets | | | |
| SPDF Capacity | 220 Sheets | | | |
| Weight [Mainframe] | Less Than 85.5Kg | | Less Than 87.5Kg | |
| Dimensions W x D x H [Standard] | 587 x 685 x 788 mm | | | |
| Dimensions W x D x H [Maximum] (excluding ARDF/SPDF) | 668 x 738 x 1030 mm | | | |
| Power Source | 220 - 240V 50/60Hz | | | |
| COPIER | | | | |
| Multiple Copying | Up to 999 Copies | | | |
| Resolution | 600 dpi | | | |
| Zoom | From 25% to 400% in 1% Step | | | |
| PRINTER | | | | |
| CPU | Intel Atom Processor ApolloLake 1.3GHz | | Intel Atom Processor ApolloLake 1.6GHz | |
| Printer Language : Standard | PCL5c, PCL6, Postscript 3 (emulation), PDF direct (emulation) | | | |
| Printer Language : Option | Genuine Adobe® Postscript®3™, XPS, IPDS, PictBridge, PDF Direct from Adobe® | | | |
| Print Resolution | 1,200 x 1,200 dpi | | | |
| Network Interface : Standard | Ethernet 10 base-T/100base-TX/1000 base-T, USB Host I/F Type A, USB Device I/F Type B | | | |
| Network Interface : Option | Bi-directional IEEE 1284/ECP, Wireless LAN (IEEE 802.11a/b/g/n), Additional NIC (2nd port) | | | |
| Mobile Printing Capability | Apple AirPrint®, Mopria®, NFC, Ricoh Smart Device Connector | | | |
| Windows® environments | Windows® 7, Windows® 8.1, Windows®10, Windows® Server 2008, Windows® Server 2008R2, Windows® Server 2012R2, Windows® Server 2016 | | | |
| Mac OS environments | Macintosh OS X10.11 or Later | | | |
| UNIX environments | UNIX Sun® Solaris, HP-UX, SCO OpenServer, RedHat® Linux Enterprise, IBM® AIX | | | |
| SAP® environments | SAP® S/4® | | | |
| Other Supported environments | IBM iSeries | | | |
| SCANNER | | | | |
| Scanning Speed | 120ipm (Simplex) / 240ipm (duplex) | | | |
| Resolution : Maximum | 1,200 dpi | | | |
| Compression Method | TIFF (MH, MR, MMR, JBIG2), Grayscale | | | |
| File Formats | Single Page TIFF, Single page JPEG, Single Page High compression PDF, Single page PDF-A, Multi page TIFF, Multi page PDF, Multi page High compression PDF, Multi Page PDF-A | | | |
| Scan Modes | Email, Folder, USB, SD Card | | | |
| FACSIMILE | | | | |
| Circuit | PSTN, PBX | | | |
| Transmission Speed | 2 Seconds | | | |
| Modem Speed : Maximum | 33.6 Kbps | | | |
| Resolution : Standard | 8 x 3.65 line/mm, 200 x 100 dpi | | | |
| Resolution : Option | 16 x 15.4 line/mm, 400 x 400 dpi | | | |
| Compression Method | MH, MR, MMR, JBIG | | | |
| Memory : Standard | 4MB (320 Pages) | | | |
| Memory : Maximum | 60MB (4,800 Pages) | | | |
| PAPER HANDLING | | | | |
| Recommended Paper Size | SRA3, A3, A4, A5, A6, B4, B5, B6 | | | |
| Paper Input Capacity Std | 1,200 Sheets | | | |
| Paper Input Capacity Max | 4,700 Sheets | | | |
| Paper Output Capacity Std | 500 Sheets | | | |
| Paper Output Capacity Max | 1,625 Sheets | | 3,625 Sheets | |
| Paper Weight | 60 - 300g/m ² | | | |
| Paper Types | Plain paper, Recycle paper, Special paper, Color paper, Letterhead, Cardstock, Preprinted paper, Bond paper, Coated paper, Envelope, Gloss paper, Label paper, OHP | | | |
| ECOLOGY | | | | |
| Power Consumption : Max | Less Than 1,700 W | | Less Than 1,850 W | |
| Power Consumption : Ready | 47.6 W | | 59.0 W | |
| Power Consumption : Sleep | 0.55 W | | 0.62 W | |
| TEC Value | 1.1kWh | 1.3kWh | 1.8kWh | 2.7kWh |

RICOH IM C3000 / IM C3500 / IM C4500 / IM C6000

MAIN SPECIFICATIONS

| MODEL | RICOH IM C3000 | RICOH IM C3500 | RICOH IM C4500 | RICOH IM C6000 |
|--|--|----------------|----------------|----------------|
| OUTPUT TRAY AND FINISHER OPTION | | | | |
| 1 x 550-Sheets Paper Tray (PB 3270) | Paper Size : A6-SRA3, Paper Weight : 60-300g/m ² | | | |
| 2 x 550-Sheets Paper Tray (PB 3280) | Paper Size : A6-SRA3, Paper Weight : 60-300g/m ² | | | |
| 2,000-Sheets Large Capacity Tray (LCIT PB3290) | Paper Size : A4, Paper Weight : 60-300g/m ² | | | |
| 1,500-Sheets Large Capacity Tray (LCIT RT3040) | Paper Size : A4, Paper Weight : 60-300g/m ² | | | |
| 1,000-Sheets Hybrid Finisher (SR3260) | Paper Size : Proof Tray :A6-A3, Shift Tray : A6-A3, Paper weight : 60-300g/m ² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples Staple capacity Max : 50 sheets (A4) 30 Sheets (A3) Stapleless capacity Max : 5 sheets (A4/A3) | | | |
| 3,000-sheet Finisher (SR 3280) [Available for IM C4500, IM C6000 only] | Paper Size : Proof Tray :A6-A3, Shift Tray : A6-A3, Paper weight : 60-300g/m ² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples, Top slant Staple capacity Max : 50 sheets (A4) 30 Sheets (A3) | | | |
| 1,000-Sheet Booklet Finisher (SR3270) | Paper Size : Proof Tray :A6-A3, Shift Tray : A6-A3, Booklet tray : A4-A3 Paper weight : 60-300g/m ² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples, Booklet Staple capacity Max : 50 sheets (A4) 30 Sheets (A3) | | | |
| 2,000-Sheet Booklet Finisher (SR3290) [Available for IM C4500, IM C6000 only] | Paper Size : Proof Tray :A6-A3, Shift Tray : A6-A3, Booklet tray : A4-A3 Paper weight : 60-300g/m ² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples, Booklet Staple capacity Max : 50 sheets (A4) 30 Sheets (A3) | | | |
| 500-Sheet Internal Finisher (SR3250) (IM C6000 is not supported) | Paper Size : A6-A3, Paper weight : 60-300g/m ² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top, Bottom, 2 Staples Staple capacity Max : 50 sheets (A4) 30 Sheets (A3) | | | |
| 250-Sheet Internal Finisher (SR3300) (Available for IM C3000, IM C3500 only) | Paper Size : A6-A3, Paper weight : 60-300g/m ² Staple paper size : A4-A3, Staple paper weight :52-105g/m Staple position : Top,1 Staple Staple capacity Max : 2-5 sheets (A4) | | | |
| Internal Shift Tray (SH3080) | Tray Capacity : 250 sheets, Paper size : 320 mm x 600 mm or smaller, Paper weight : 60-300g/m ² | | | |
| One-bin tray (BN3130) | Tray Capacity : 125 sheets, Paper size : A5 - A3, Paper weight : 52-300g/m ² | | | |
| OTHER OPTIONS | | | | |
| Platen Cover PN2000, DF3110, DF3120, Fax Option Type M37, G3 Interface Unit Type M37, Fax Connection unit Type M37, FAX Memory unit Type M19 64MB, Memory Unit Type M37 4GB, Caster Table Type M3, VM Card Type M37, Side Tray, Punch Unit NA/EU/SC (PU3070,PU3080,PU3090), Internal Multi-fold unit FD3010, Camera direct print card, Postscript3 Unit Type M37, XPS direct print Option Type M37, IEEE 1284 I/F Type M19, IEEE 802.11a/g/n I/F Type M19, Device server option Type M37, File format Converter Type M19, OCR Unit Type M13, Small Paper Feeding Unit Type M37, Page Keeper Type M37, ADF Handle, External Keyboard Bracket Type M19, Optional Counter Interface Unit Type M12, Key Counter Bracket Type M3, NFC Card Reader Type M37, Smart Card Reader Built in Unit Type M37, External USB Keyboard (No bracket), Color Controller E-25C, Unicode Font Package for SAP®License. | | | | |

RICOH
imagine. change.

www.ricoh-ap.com

RICOH ASIA PACIFIC PTE LTD

103 Penang Road #08-01/07, VISIONCREST Commercial, Singapore 238467
Phone: +65 6830 5888, Fax: +65 6830 5830

All brand and/or product names are trademarks of their respective owners. Specifications and external appearance are subject to change without notice. The colour of the actual product may vary from the colour shown in the brochure. The images in this brochure are not real photographs and slight differences in detail might appear. Copyright © 2020 Ricoh Asia Pacific Pte Ltd. All rights reserved. This brochure, its contents and/or layout may not be modified and/or adapted, copied in part or in whole and/or incorporated into other works without the prior written permission of Ricoh Asia Pacific Pte Ltd.



RICOH @Remote

