


OVERVIEW

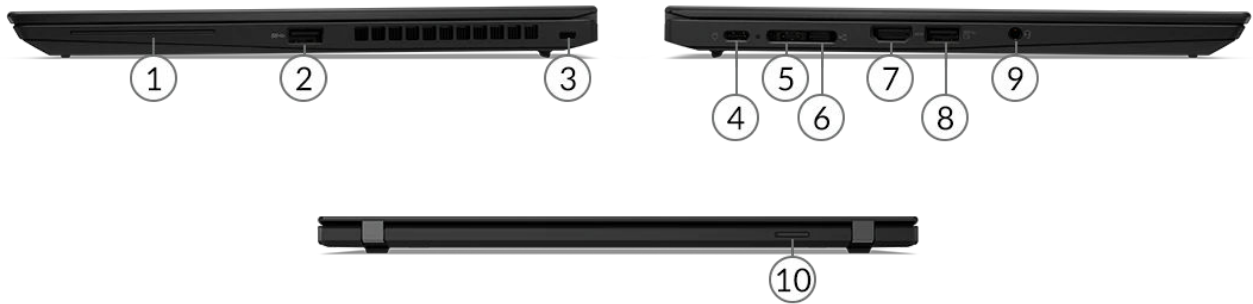

1. Smart card reader *	6. Ethernet extension connector (mini RJ-45) *
2. USB 3.2 Gen 1	7. HDMI 2.0
3. Kensington Nano Security Slot	8. USB 3.2 Gen 1 (Always On)
4. USB-C 3.2 Gen 2	9. Headphone / microphone combo jack (3.5mm)
5. USB-C 3.2 Gen 2	10. Nano-SIM card slot *

Notes:

- Ports with * are only available on selected models
- The combination of 5 and 6 is side docking connector

PERFORMANCE

Processor

Processor Family

AMD Ryzen™ 3 / 5 / 7 Processor

Processor**^[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 3 PRO 5450U	4	8	2.6GHz	4.0GHz	2MB L2 / 8MB L3	LPDDR4-4266	AMD Radeon™ Graphics
AMD Ryzen 5 5600U	6	12	2.3GHz	4.2GHz	3MB L2 / 16MB L3	LPDDR4-4266	AMD Radeon Graphics
AMD Ryzen 5 PRO 5650U	6	12	2.3GHz	4.2GHz	3MB L2 / 16MB L3	LPDDR4-4266	AMD Radeon Graphics
AMD Ryzen 7 5800U	8	16	1.9GHz	4.4GHz	4MB L2 / 16MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 7 PRO 5850U	8	16	1.9GHz	4.4GHz	4MB L2 / 16MB L3	LPDDR4-4266	AMD Radeon Graphics

Notes:

- Ryzen 3 PRO 5450U and Ryzen 5 5600U are NOT available in EMEA.

Operating System

Operating System**

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Windows 10 Pro 64
- Windows 10 Home 64
- Windows 10 Home 64 Single Language
- Windows 10 IoT Enterprise LTSC
- Linux
- Ubuntu Linux
- No operating system

Graphics

Graphics

Graphics	Type	Memory	Key Features
AMD Radeon Graphics	Integrated	Shared	DirectX® 12

Monitor Support

Monitor Support

Supports up to 4 independent displays (native display and 3 external monitors via HDMI® and USB-C®)

- HDMI supports up to 4K@60Hz
- USB-C supports up to 5K@60Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory^[1]

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type

LPDDR4x-4266

Notes:

- 1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.

Storage

Storage Support^[1]

One drive, up to 256GB M.2 2242 SSD or 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 3.0 x4 slot

Storage Type^{[2]}**

Disk Type	Interface	RPM	Offering	Security
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	-	256GB	-
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	-	2TB	Opal2
M.2 2280 SSD	PCIe NVMe, PCIe x4	-	256GB / 512GB / 1TB	Opal2

Notes:

- 1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
- 2. The SSD with PCIe 4.0x4 performance is downgraded to closer to PCIe 3.0x4 performance due to the system slot limitation.

Removable Storage

Optical

None

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

- Dual-microphone array with 360° noise-cancelling, far-field
- No microphone

Camera^{}**

- HD 720p, with privacy shutter, fixed focus
- HD 720p + IR hybrid, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery

Integrated Li-Polymer 57Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life^[1]

MobileMark® 2018: 14.9 hr

JEITA 2.0: 19.4 hr

Notes:

- 1. All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life

benchmark tests. Actual battery life will vary and depends on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter**^{[1][2]}

- 45W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

1. AC adapter offerings depend on the country.
2. 45W USB-C AC adapter is only available for the models with integrated graphics.
No power adapter is for special bid only.

DESIGN

Display

Display**^[1]

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle	Key Features
14"	FHD (1920x1080)	None	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
14"	FHD (1920x1080)	None	IPS	400 nits	Anti-glare	16:9	1200:1	72% NTSC	170°	Low power
14"	FHD (1920x1080)	Multi-touch	IPS	300 nits	Anti-glare	16:9	700:1	45% NTSC	170°	-
14"	FHD (1920x1080)	Multi-touch	IPS	500 nits	Anti-glare	16:9	1000:1	72% NTSC	178°	ThinkPad® Privacy Guard
14"	UHD (3840x2160)	None	IPS	500 nits	Anti-glare	16:9	1500:1	100% Adobe® RGB	178°	Dolby Vision™, DisplayHDR™ 400

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product. For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight^[1]

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and Mylar® surface multi-touch touchpad

Notes:

1. Non-backlit keyboard is only available for the models with black cover.

Mechanical^[1]

Dimensions (WxDxH)

Models	Dimensions
Models with black cover and FHD Low Power / UHD display	327.5 x 224 x 16.14 mm (12.89 x 8.82 x 0.64 inches)
Models with black cover and FHD touch / FHD non-touch / FHD Privacy Guard display	327.5 x 224.4 x 16.81 mm (12.89 x 8.83 x 0.66 inches)
Models with storm grey cover	327.5 x 225.3 x 16.81 mm (12.89 x 8.87 x 0.66 inches)

Weight

Models	Weight
Models with black cover and FHD Low Power / UHD display	Starting at 1.28 kg (2.83 lbs)
Models with black cover and FHD Privacy Guard display	Starting at 1.415 kg (3.12 lbs)
Models with black cover and FHD touch / FHD non-touch display	Starting at 1.36 kg (2.99 lbs)
Models with storm grey cover and FHD Low Power / UHD display	Starting at 1.51 kg (3.32 lbs)
Models with storm grey cover and FHD Privacy Guard display	Starting at 1.62 kg (3.57 lbs)
Models with storm grey cover and FHD touch / FHD non-touch display	Starting at 1.57 kg (3.46 lbs)

Case Color[2]**

- Storm grey
- Villi black

Case Material**

- Villi black models: carbon fiber hybrid (top), magnesium (keyboard cover), aluminium (bottom)
- Storm grey models: aluminium (top), aluminium (keyboard cover & bottom)

Notes:

1. The system dimensions and weight vary depending on configurations.
2. Storm grey case is NOT available in EMEA.

CONNECTIVITY

Network

Ethernet

- Gigabit Ethernet, Realtek RTL8111EPV, mini RJ-45 to RJ-45 via optional ThinkPad Ethernet Extension Adapter Gen 2, supports Wake-on-LAN
- No onboard Ethernet

WLAN + Bluetooth®[1][2]**

- Intel® Wi-Fi® 6 AX200, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Wi-Fi 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Mediatek Wi-Fi 6 MT7921, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1
- Realtek Wi-Fi 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1
- Qualcomm® Wi-Fi 6E QCNFA765, 802.11ax Dual Band 2x2 Wi-Fi + Bluetooth 5.1, M.2 Card

WWAN[3]**

- Wireless WAN upgradable to 4G (with antenna ready)
- Quectel EM120R-GL, 4G LTE CAT12, M.2 card
- Quectel EM120R-GL, 4G LTE CAT12, M.2 card, with embedded eSIM functionality
- Qualcomm Snapdragon™ X55 5G Modem-RF System, Sub-6 GHz, M.2 card, with embedded eSIM functionality
- No support

SIM Card

- Gemalto eSIM card (physical)
- No SIM card inbox

NFC[4]

- Near Field Communication
- No support

ThinkPad T14s Gen 2 (AMD)

Notes:

1. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitation
2. Wi-Fi 6 and Wi-Fi 6E full features might be limited by country level restrictions.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.
3. WWAN is NOT available for the models with storm grey cover.
4. NFC is NOT available for the models with storm grey cover.

Ports^[1]

Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 2x USB-C 3.2 Gen 2 (support data transfer, Power Delivery and DisplayPort™ 1.4)
- 1x HDMI 2.0
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports^{***[2]}

- 1x Ethernet extension connector (mini RJ-45)
- 1x Side docking connector (Ethernet models only)
- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt™ 3/4: 40 Gbit/s
2. Ethernet and side docking connector are coexisting. On some models, both of them are equipped. On some models, neither of them is equipped.
If your computer has Ethernet icon, it supports wired Ethernet connection with ThinkPad Ethernet Extension Adapter or ThinkPad Basic/Pro/Ultra Docking Station.
If your computer does not have Ethernet icon, the Ethernet connector does not support Ethernet connection. We recommend you use the Lenovo USB-C to Ethernet Adapter for Ethernet connection.

Docking

Docking

Various docking solutions supported via side docking connector (optional) or USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad T14s Gen 2 \(AMD\)](#)

Monitor Cable

Monitor Cable^{***}

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Nano Security Slot™

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- NVMe password
- Self-healing BIOS

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert

MANAGEABILITY

System Management

System Management

- DASH
- Non-DASH

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service
- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

ENVIRONMENTAL

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories***

- Lenovo USB-C to Ethernet Adapter
- ThinkPad Ethernet Extension Adapter Gen 2
- None

CERTIFICATIONS

Green Certifications

Green Certifications

- EPEAT™ Gold
- ENERGY STAR® 8.0
- TCO Certified
- RoHS compliant

Other Certifications


Mil-Spec Test

MIL-STD-810H military test passed

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMDZ1

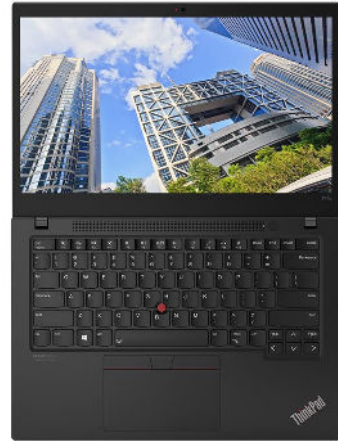

AMDZ1



AMDZ1



AMDZ1



AMDZ1



AMDZ1